

 THE FUTURE IS NOW



GO-SCAN 4335

Portable Digital Radiography Detector



TELEDYNE ICM
Everywhere you look™

Enter into the new world of digital inspection



**BATTERY
OPERATED**



IP 67



**WIRELESS
OR CABLE**




**ASI
TECHNOLOGY**




PLUG & PLAY



RUGGEDIZED



**STATE-OF-
THE-ART
IMAGE EDITING
SOFTWARE**



**FULLY
INTEGRATED**

FEATURES


	Unit	GO-SCAN 4335
GENERAL		
Technology	-	aSi
Pixel pitch	μm	154
Active area	mm/in	433.7 x 354.8 / 16.9 x 13.8
Active resolution	pxl	2816 x 2304
BANDWIDTH		
Data interface	-	GigE & Wi-Fi
ADC conversion	bits	16
POWER CONSUMPTION		
Power consumption	W (standing/ operating)	< 8 / 20
INTEGRATION		
Overall dimension	mm/in	464 x 388 x 188 / 18.26 x 15.27 x 7.4
Overall weight (without sleeve)	Kg/lbs	5.9 / 13
ENVIRONMENTAL		
Waterproof level	-	IP67
Drop test	m/in	1/39
Operating temperature	°C/°F	-20, 50°C / -4, +122°F
Storage temperature	°C/°F	-20, 50°C / -4, +140°F
Humidity	% R.H.	30 to 75
Life span	Gy/k rem	1000 / 100

SHERLOCK NDT SOFTWARE



Image editing	Smart measurement tool
ADRC dynamic filter	SNR
Local contrast enhancement	Greyscale feature
Teledyne filter	iSRb
Histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition

DRAWINGS

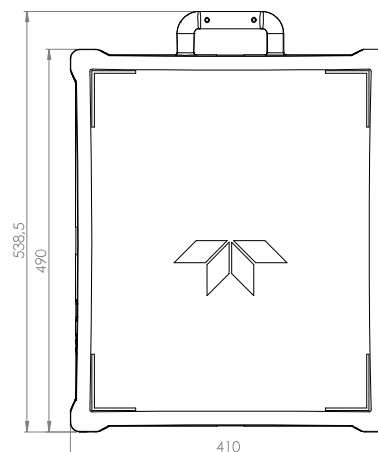

ACCESSORIES



FIXTURING BAR



LATERAL FEET



**POWER/COM
CABLE**

All specifications are non contractual and subject to change without prior notice.

TELEDYNE ICM

Zoning Les Plenesses / Rue Du Progrès 3 / B-4821 Andrimont (Dison) - Belgium



TELEDYNE ICM
Everywhere you look™